

# DSDT Series



## SWITCH OPERATION AND TAPING

Use tweezers or ball point pen for operation

## FEATURES

- ① All materials are UL94V0 grade, high temperature resistant plastic.
- ② Twin contact design to ensure stable contact.
- ③ Gold-plated contact to ensure low contact resistance Tin plated terminals to prevent contamination during soldering.

## MATERIAL

Part Name	Material	Finished
Base	UL94V0(PPS)	Black
Cover	UL94V0(PPS)	Black
Actuator	UL94V0(PA46)	White
Movable	Copper Alloy	Gold/Tin
Terminal Contact	Brass	Gold/Tin
Terminal	Brass	Gold/Tin

## RATINGS

Contact Rating	Switching	25mA at 24VDC
	Non-Switching	100mA at 50VDC
Contact Resistance	Initial	50mΩ Max.
	After life	100mΩ Max.
	Insulation Resistance	100MΩ Min. 60sec at 500VDC
	Dielectric Strength	500V DC for 60 seconds
	Switch Capacitance	5pF Max. at 1M Hz
	Operation Temperature	-40°C~+85°C
	Storage Temperature	-40°C~+85°C
Mechanical & Processing	Operation Force	1000gf Max.
	Mechanical Life	3000 cycles operations
	Resistance to Soldering	260±5°C for 3-5 seconds
	Electrical Life	2000 cycles 25mA 24VDC


## DIMENSIONS (UNIT:MM)

## ORDER INFORMAT

Gold/Gold Platedg Type P/N	Dimensions mm(inch)		Quantity per Tube
	A	B	
DSDT04LH/SGET	11.64(0.46)	7.62(0.3)	43
DSDT05LH/SGET	14.18(0.56)	10.16(0.4)	35
DSDT06LH/SGET	16.72(0.66)	12.70(0.50)	30
DSDT08LH/SGET	21.80(0.86)	17.78(0.7)	23
DSDT09LH/SGET	24.34(0.96)	20.32(0.8)	20
DSDT10LH/SGET	26.88(1.06)	22.86(0.9)	18

DSDT	04	L	S	G	E	T
Tri-state	Positions: 04=4 Position 05=5 Position 08=8 Position		Terminal H=Straight S= SMD type		Finish E=3u"Gold-plated F=10u"Gold-plated A=12u"Gold-plated B=20u"Gold-plated G=30u"Gold-plated	
		Actuator: L=Extension	Finish G=Full Gold S=Contat-Gold-plated Terminal-Tin Plated		Packing R=Tepe&Reel T=Tube	

## DIMENSIONS (UNIT:MM)

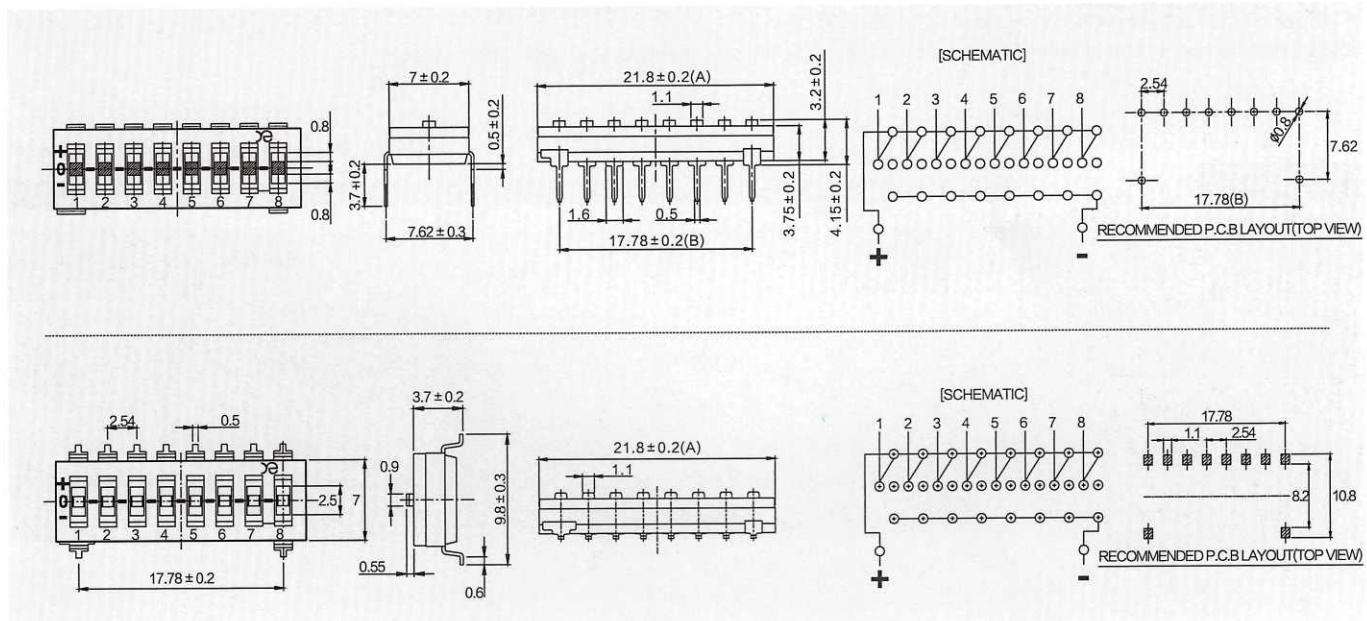

## ENVIRONMENTAL TEST

Cold Resistance Test	Switches under temperature at $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 96 hours.
Dry Heat Resistance Test	Switches under temperature at $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 96 hours.
Humidity Test	Per MIL-STD-202F, Method 103B, Test Condition B: There shall be no evidence of corrosion and the insulation resistance shall be no less than 100 megaohms.
Vibration Test	Per MIL-STD-202F, Method 204D, Test Condition A: There shall be no opening of closed contacts or closing of open contacts in excess of 10 microseconds.
Shock Test	Per MIL-STD-202F, Method 213B, Test Condition A: There shall be no opening of closed contacts or closing of open contacts in excess of 10 microseconds.
Thermal Shock Test	Per MIL-STD-202F, Method 107G, Test Condition A: There shall be no evidence of physical damage or permanent change in electrical characteristics.
Salt-Spray Test	Per MIL-STD-202F, Method 101D, Test Condition B: There are under $35 \pm 2^{\circ}\text{C}$ in temperature and $5 \pm 1\%$ salt-water concentration for $48 \pm 1$ hour.