



SMD Crystal Unit

FCX-06

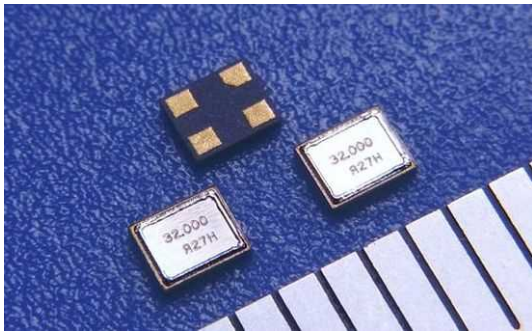

◆ FEATURES

- AT-cut, MHz crystal unit (16 ~ 90 MHz)
- Compact package (2.0 × 1.6 × 0.5 mm Max. / 5.6 mg)
- Low frequency available from 16 MHz
- High-precision frequency (available from ±7ppm @25°C)
- Automotive temperature range (-40 ~ +125°C)
- High-reliable ceramic/metal package sealed with electron beam
- One of our best-selling models
- Long seller (since 2004)
- Specifications in conformity with AEC-Q200 available on request

◆ APPLICATIONS

- Smartphones / wireless-modules / wearable devices / in-vehicle units

◆ STANDARD SPECIFICATIONS / ORDERING INFORMATION

Ordering Number (Sample): **C6A** — **16000** — **060** — **C Q3** — **100** — **H X ##**
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

(1) Type
C6A

(2) Nominal Frequency
16.000 ~ 90.000 MHz e.g. 16.000 MHz = 16000

(3) Load Capacitance
5.0, 6.0, 7.0 pF*1 e.g. 6.0 pF = 060

*1 Other values available on request

(4) Frequency Tolerance @ 25°C	
±7 ppm	A
±10 ppm	B
±15 ppm	C
±20 ppm	D
±30 ppm	E
±50 ppm	F
Other	N

(5) Operating Temperature	Frequency versus Temperature Characteristics (Refer to 25°C)				
	±10 ppm	±15 ppm	±20 ppm	±30 ppm	±50 ppm
-20 ~ +70°C	P1	P2	P3	P4	P5
-30 ~ +85°C	Q1	Q2	Q3	Q4	Q5
-40 ~ +85°C	-	R2	R3	R4	R5
-40 ~ +105°C	-	-	-	S4	S5
-40 ~ +125°C	-	-	-	-	T5
Other	NN				

(6) Equivalent Series Resistance	
16 ~ 23 MHz: 100Ω Max.	100
23 ~ 40 MHz: 60Ω Max.	060
40 ~ 90 MHz: 50Ω Max.	050
Other	NNN

(7) Storage Temperature*2	
-40 ~ +85°C	G
-40 ~ +105°C	H
-55 ~ +125°C	J
Other	N

*2 Not applicable to packing materials


(8) Tape & Reel (φ180 mm)	
3000 pcs/reel	X
Other	N

(9) RIVER Use Only (As needed)

Drive Level
200 μW Max.


- "Ordering Number" codes are indicated in blue, and the corresponding specifications are described in black.
- Not all combinations of options are available as a standard specification.
- For "Overall Frequency-Tolerance" specifications, please select "N" for the "(4) Frequency Tolerance", and let our sales know your requirement.
- For specifications other than those above, please consult our sales or contact us via our website with your requirement.

◆ OUTLINE DIMENSIONS

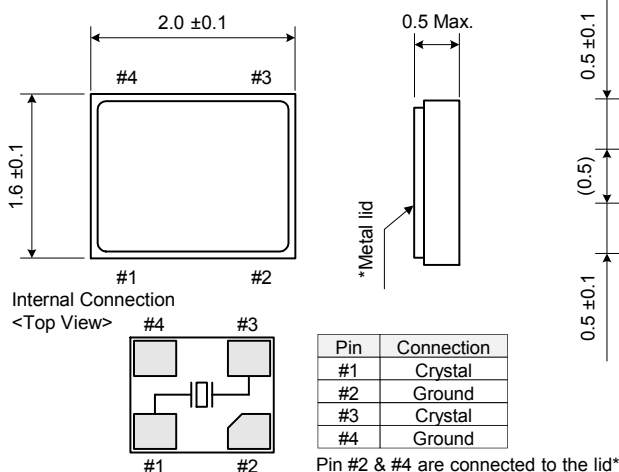

◆ LAND PATTERN

Unit: mm

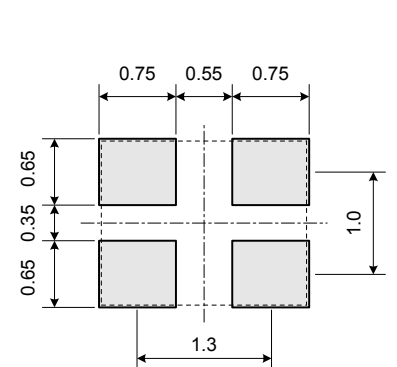

RIVER RIVER ELETEC CORPORATION

<http://www.river-ele.co.jp>

Sales Contacts: River Electronics (Singapore) Pte. Ltd TEL: +65-6258-7874
 Taiwan River Co. Ltd (Chinese Taipei) TEL: +886-2-8988-2
 Xi'an River Electronics Corporation (China) TEL: +86-755-8652

TELCONA
 TELCONA AG • Im Vorderasp 4 • CH-8154 Oberglatt • Switzerland
 Tel. +41 (0) 44 860 25 50 • Fax +41 (0) 44 860 28 22
 info@telcona.com • www.telcona.com