



Ceramic SMD Crystals

■ Holder Type: M7

Frequency Range:

32.768 kHz

Features:

- High Reliability & Low Cost Unit
- Compact Design
- RoHS Compliant
- Lead Free
- 260°C Reflow Compatible



Actual Size



■ Standard Specifications

Item	M7 (4.9x1.8)
Frequency Range	32.768kHz
Equivalent Series Resistance (ESR)	70kΩ Max
Frequency Tolerance @ 25 °C	±20ppm (tighter tolerance also available)
Temperature Coefficient	-0.034 ± 0.006ppm /°C ²
Operating Temperature Range	-40 °C to +85 °C
Operable Temperature Range	-55 °C to +125 °C
Turnover Temperature	25 °C ± 5 °C
Load Capacitance	9.0pF , 12.5pF are standard
Drive Level	0.1μW Typ. (0.5μW Max)
Shunt Capacitance	2.0pF Max
Ageing	±3ppm/year Max

Note:

1. Manufacturer reserves the right to change the specification and content of this product for improvement without notification.
2. Custom specification is welcome. Please contact our sales representative for further details.
3. If the crystal is intended for applications which have direct impact on human life and properties, and require a high degree of reliability and safety concerns, customers must provide full information such as but not limit to the application, electrical and reliability specification at the inquiry beginning stage.
4. Customers have to agree to the "Guideline for handling crystal units" and "Standard Terms and Condition of Sales" which is printed this catalog before placing orders to our company or our distributors. There are also unpredictable factors such as applied condition, oscillation margin and etc and customers must check them beforehand. In case of queries, please do not fail to send inquiry to our company before ordering.

<http://www.hongkongcrystal.com>

E-mail: China: salescn1@hongkongcrystal.com

HongKong/Overseas: inquiry@hongkongcrystal.com

HongKong/Overseas

Shenzhen: T: +86 755 2610 8888




Shanghai: T: +86 21 5108 8888

TELCONA

TELCONA AG • Im Vorderasp 4 • CH-8154 Oberglatt • Switzerland
Tel. +41 (0) 44 860 25 50 • Fax +41 (0) 44 860 28 22
info@telcona.com • www.telcona.com



■ Dimensions (mm)




* Recommended no circuitry or trace in between the solder pads


MARKING INFORMATION



■ Tape & Reel (mm)

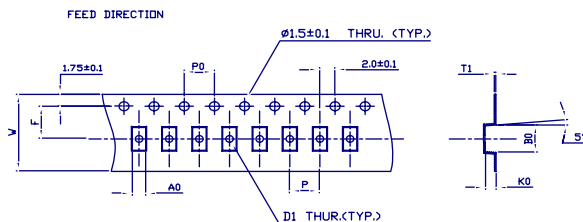

SECTION A-A

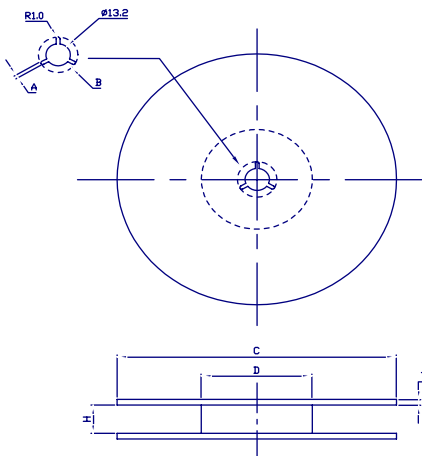

		4.9x1.8 M7 SMD
T A P E	W	12.0
	P	4.0
	A0	2.1
	B0	5.3
	K0	1.1
	P0	4.0±0.1
	F	5.5
	D1	1.0
R E E L	T1	0.30
	C	Ø180
	A	2.0
	B	Ø21.0±0.8
	D	Ø6.0
	H	13.0
T	2.5 Max	
STANDARD PACKING QTY/REEL		3000PCS
MAXIMUM PACKING QTY		99999PCS